


Delta Rapid Link Data Sheet

Description 8 MM. DELTA RAPID LINK IN zinc plated steel

Rod Steel FM-8 Nut Steel A-42-FM

DIRECTION OF LOADING
 All loads quoted assume
 straight pull as shown.
 Do not overload, stay
 within the recommended
 working load limit

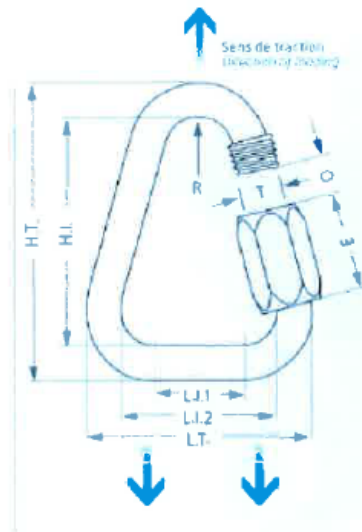

MM.	L.T.	L.1.1.	L.1.2	H.T.	H.I	O	E	R	T	Weight	Working Load Limit	Breaking Load
	mm.	Mm	Mm	Mm	Mm	Mm	Mm	Mm	Mm	g	Kg	kg
6	47	20.5	35.	56.	44.	7.5	19.	7.25	9.0	39	250	1,250